
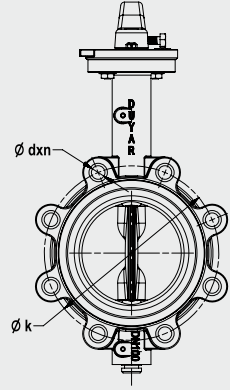


LUG KELEBEK VANA (NİKEL KLAPELİ, PN 16)

T-1010 Sfero Döküm / Ductile Iron

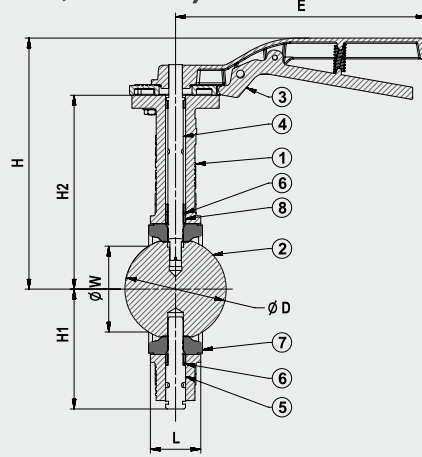

No	Parça Adı / Part Name	Malzeme / Material
1	Gövde / Body	GGG 40 - EN GJS 400-15 - Sfero Döküm / Ductile Iron
2	Klape + Kaplama / Clapper + Plated	GGG 40 - EN GJS 400-15 - Sfero Döküm + Nikel Kaplama / Ductile Iron + Nickel Plated
3	Kol / Lever	GGG 40 - EN GJS 400-15 - Sfero Döküm / Ductile Iron
4	Üst Mil / Top Stem	X20Cr13 - AISI420 - Paslanmaz Çelik / Stainless Steel
5	Alt Mil / Bottom Stem	X20Cr13 - AISI420 - Paslanmaz Çelik / Stainless Steel
6	O-Ring	EPDM
7	Conta / Seat	EPDM -NBR
8	Mil Yatağı / Stem Bearing	Yağlı Bronz / Lubricated Bronze

Ölçüler / Dimensions	Anma Basıncı / Nominal Pressure	16 Bar															
	Anma Çapı / Nominal Diameter	DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
	Vana Boyutları / Valve Dimensions	L	33	43	46		52	56		60	68	78		102	114	127	154
		E	210				265			355	Dişli Kutuludur/ With Gear Box						
		H1	77	81	87	99	111	132	144	185	208	251	277	308	342	374	459
		H2	144	162	175	193	200	218	226	280	315	354	388	416	455	490	562
		H	205	222	235	253	260	288	296	340	Dişli Kutuludur/ With Gear Box						
		W	26.8	31	45.9	62.2	90.6	110	145.6	193.9	241.6	292.3	341.8	388.8	445.6	480.5	566.4
		D	42.5	53	65	79	104.5	123.5	156	203	251	302.5	354	402	455	492.5	582
		k	110	125	145	160	180	210	240	295	355	410	470	525	585	650	770
		dxn	M16x4			M16x8			M20x8	M20x12	M24x12		M24x16	M27x16	M27x20	M30x20	M33x20
		Tepe Flanş / Upper Flange	(ISO 5211) F05				(ISO 5211) F07			(ISO 5211) F10				(ISO 5211) F16			
	Mil Ölçüsü / Stem Dimension	□9				□14		□17			□22		Ø31,8	Ø33,3	Ø38,1	Ø41,3	Ø50,8
Ağırlık / Weight	Kg	3,5	4,5	5,5	6	8	9	11	17	23	35	52	94	115	159	250	

Çalışma Sıcaklık Aralığı : -10 ... +110 °C (16 Bar)

Bağlantı Boyutları : TS EN 1092-2 (PN 16)

HVAC Sistemleri : Arıtma Tesisleri, Kağıt Endüstrisi, Tatlı Su Tesisatları