


REDÜKSİYON KONSANTRİK & EKSANTRİK

TS 2649 KT7
DIN 2616

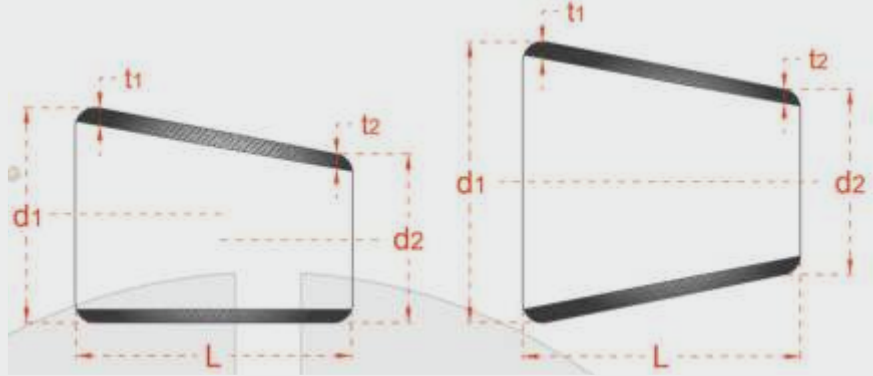

DN	DIŞ ÇAP DIAMETER	ET KALINLIĞI WALL THICKNESS			DIŞ ÇAP DIAMETER	ET KALINLIĞI WALL THICKNESS			L	SCH 40 ORTALAMA AĞIRLIK APPROX WEIGHT
		d 1	t 1			d 2	t 2			
			SCH 20	SCH 40			SCH 80	SCH 20		
20	26.9	2.3	2.9	x	21.3	2.0	x	x	38	0.07
				x	17.2	1.8	x	x		
25	33.7	2.6	3.6	x	26.9	2.3	2.9	x	50	0.13
				x	21.3	2.0	2.9	x		
32	42.4	2.6	3.6	x	33.7	2.6	3.6	x	50	0.17
				x	26.9	2.3	2.9	x		
				x	21.3	2.0	2.9	x		
40	48.3	2.6	3.6	x	42.4	2.6	3.6	x	64	0.26
				x	33.7	2.6	3.6	x		
				x	26.9	2.3	2.9	x		
50	60.3	2.9	4.0	5.6	48.3	2.6	3.6	x	76	0.41
					42.4	2.6	3.6	5.6		
					33.7	2.6	3.6	x		
65	76.1	2.9	5.6	7.1	60.3	2.9	4.0	x	90	0.77
					48.3	2.6	3.6	5.6		
					42.4	2.6	3.6	x		
80	88.9	3.2	5.6	8.0	76.1	2.9	5.6	x	90	1
					60.3	2.9	4.0	7.1		
					48.3	2.6	3.6	5.6		
100	114.3	3.6	6.3	8.8	88.9	3.2	5.6	8.0	100	1.6
					76.1	2.9	5.6	7.1		
					60.3	2.9	4.0	5.6		
125	139.7	4.0	7.1	10.0	114.3	3.6	6.3	8.8	127	2.8
					88.9	3.2	5.6	8.0		
					76.1	2.9	5.6	7.1		
150	168.3	4.5	7.1	11.0	139.7	4.0	7.1	10.0	140	3.9
					114.3	3.6	6.3	8.8		
					88.9	3.2	5.6	8.0		
200	219.1	5.9	8.0	12.5	168.3	4.5	7.1	11.0	152	6.5
					139.7	4.0	7.1	10.0		
					114.3	3.6	6.3	8.8		

Çelik ve paslanmaz üretilebilir.
Ölçüler mm olarak yazılmıştır.